


## 1. Connect the GrowNET Cable

Connect the sensor to the relay using the included cross-over & ethernet cables as shown in the diagram.

**⚠ IMPORTANT! ONLY use cross-over adapters provided by Agrowtek.**  
Incorrect cross-over adapters or cables can cause damage to the equipment.

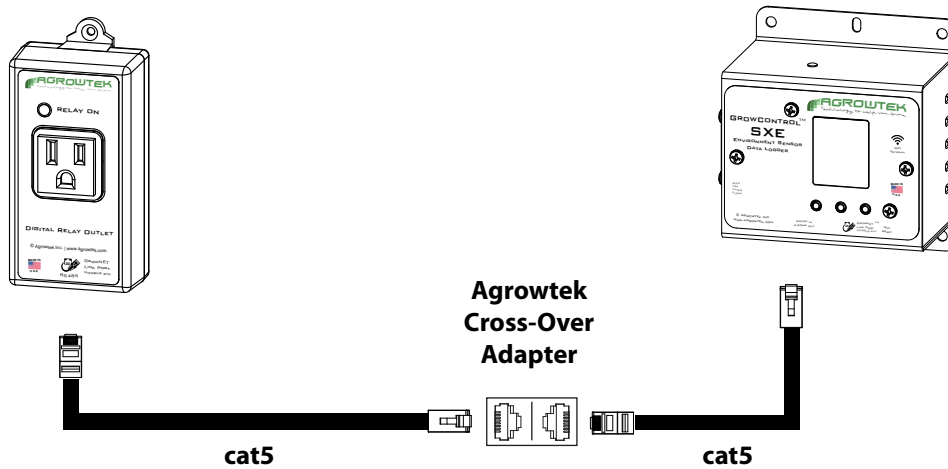

## 2. Mount the Sensor & Relay



Mount the SXE climate sensor to a wall surface that is accessible and has good air circulation.

Plug the RX1i outlet relay into a 120Vac wall outlet. **Do not remove or circumvent the ground pin.**

## 3. Connect Power to the SXE Sensor

Plug the 24Vdc power adapter into the SXE and a 120Vac wall outlet. The SXE sensor will power-on and connect to the RX1i relay.

Follow the LCD Menu Operation instructions for details on setting up the relays to operate based on sensor readings and timers.

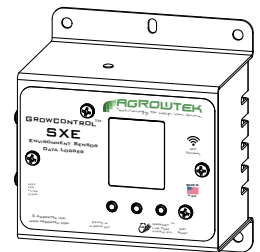

### General Notes:

1. Install with the connections facing down to reduce the risk of water damage.
2. For indoor installation only. Enclosures are not water-proof.
3. Do not place sensor in direct sunlight.

If the "RELAYS" menu item is not show, ensure the COMM MODE is set to "MINI MASTER"

Read operation manual before operating equipment.  
**Complete manuals & videos available at: [www.agrowtek.com](http://www.agrowtek.com)**